

# UNCLASSIFIED

AD NUMBER
AD860067
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; SEP 1969. Other requests shall be referred to Air Force Weapons Lab., Kirtland AFB, NM.
AUTHORITY
AFSWC ltr, 26 Oct 1970

THIS PAGE IS UNCLASSIFIED

AD 860067




## SUMMARY OF COMMERCIAL WASTE WATER TREATMENT PLANTS

James A. Mahoney

TECHNICAL REPORT NO. AFWL-TR-69-121

September 1969



AIR FORCE WEAPONS LABORATORY

Air Force Systems Command

Kirtland Air Force Base

New Mexico

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of AFWL (WLDC), Kirtland AFB, NM, 87117.

60

AFWL-TR-69-121

AIR FORCE WEAPONS LABORATORY  
Air Force Systems Command  
Kirtland Air Force Base  
New Mexico

REPRODUCTION OF THIS DOCUMENT IS PROHIBITED

DATE: 1/21/70 BY: 1000000000

2

When U. S. Government drawings, specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This report is made available for study with the understanding that proprietary interests in and relating thereto will not be impaired. In case of apparent conflict or any other questions between the Government's rights and those of others, notify the Judge Advocate, Air Force Systems Command, Andrews Air Force Base, Washington, D.C. 20331.

DO NOT RETURN THIS COPY. RETAIN OR DESTROY.

SUMMARY OF COMMERCIAL WASTE WATER TREATMENT PLANTS

James A. Mahoney

TECHNICAL REPORT NO. AFWL-TR-69-121

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of AFWL (WLDC), Kirtland AFB, NM, 87117. Distribution is limited because of the technology discussed in the report.


FOREWORD


This report was prepared under Program Element 63723F, Subtask 3.1.001. Inclusive dates of research were 1 January 1969 to 15 August 1969. The report was submitted 31 August 1969 by the AFWL Project Engineer, Mr. James A. Mahoney (WLDC-TE).


The assistance of the following personnel are gratefully acknowledged: Donald G. Silva, Major, USAF, Chief Environics Unit, Bertrand F. Ruggles, Captain, USAF, and Dennis I. Hirota, Captain, USAF, all of the Environics Unit of the Civil Engineering Branch.

Information in this report is embargoed under the U.S. Export Control Act of 1949, administered by the Department of Commerce. This report may be released by departments or agencies of the U.S. Government to departments or agencies of foreign governments with which the United States has defense treaty commitments, subject to approval of (controlling office).

This technical report has been reviewed and is approved.

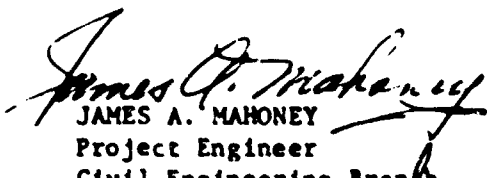  
JAMES A. MAHONEY  
Project Engineer  
Civil Engineering Branch

  
CLIFF M. WHITEHEAD, COL, USAF  
Chief, Civil Engineering Branch

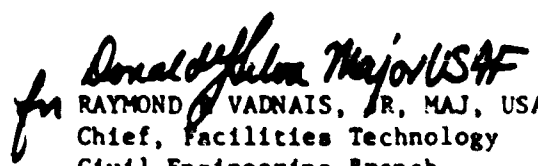  
RAYMOND J. VADNAIS, JR, MAJ, USAF  
Chief, Facilities Technology  
Civil Engineering Branch

  
HAROLD L. JAMES, COL, USAF  
Chief, Development Division

AFWL-TR-69-121

#### ABSTRACT

The purpose of the report is to catalog and review capabilities of commercially available packaged waste water treatment plants for possible Air Force application in limited war and fixed base installations. Definitions of the various methods of treatment are included. Simple curves are furnished for a quick estimate of costs, power requirements, erection time, shipping volume and weight in relation to flow capacity. Included are tables which relate the performances of a number of plants tested by the National Sanitation Foundation, by the manufacturer, and by the Florida State Board of Health. A list of firms which manufacture packaged waste water treatment plants is included in an appendix.

(Distribution Limitation Statement No. 2)

AFWL-TR-69-121

This page intentionally left blank.

AFWL-TR-69-121

CONTENTS

<u>SECTION</u>	<u>PAGE</u>
I INTRODUCTION	1
II DEFINITIONS AND OPERATIONAL CRITERIA	6
III DISCUSSION	30
IV APPLICATIONS	37
Appendix I	41
Appendix II	47
Appendix III	49
References	52
Distribution	53



LIST OF FIGURES

<u>FIGURE</u>		<u>PAGE</u>
1	Simple Extended Aeration Plant	14
2	Flow Rates, Typical Extended Aeration Plant	15
3	Contact Stabilization Process Flow Diagram	18
4	Oxidation Ditch Plant Line Diagram	19
5	Line Diagram Aerotor Plant	21
6	Aerated Lagoon	23
7	Package Waste Treatment Operational Power Requirements	31
8	Shipping Volume	32
9	Shipping Weight of Plant	33
10	Package Waste Treatment Capital Costs	35
11	Plant Erection Time	38

AFWL-TR-69-121

TABLES

<u>TABLE</u>		<u>PAGE</u>
I	Summary of Commercial Extended Aeration Packaged Sewage Treatment Plants	7
II	Summary of Commercial Contact Stabilization Packaged Sewage Treatment Plants	11
III	Packaged Treatment Plant Performance (Averages)	27
IV	Plants Tested by the Florida State Board of Health	29
V	Oxidation Ditch Construction Cost Figures	36

This page intentionally left blank.

## SECTION I

### INTRODUCTION

The purpose of this report is to catalog and review capabilities of commercially available packaged waste water treatment plants for possible Air Force application in limited war and fixed-base installations.

A packaged treatment plant is the customized combination of standard components selected by an engineer as a part of an overall waste-water system design. There is a fallacy in using the term "packaged plant" as it refers to a wide variety of fabricated treatment units. There are prefabricated factory-built plants, that handle flows up to 100,000 gallons per day (GPD). Then there are larger plants whose component parts are factory fabricated but field erected and handle flows in the millions of gallons per day.

Although packaged plants are broadly grouped into model or design series, few installations are exactly alike. Customizing of the selected basic plant may then range from the simple selection of accessory items, (comminution or chlorination equipment), to the solution of a complex sanitary engineering design problem resulting in a unique treatment plant composed of standard fabricated parts. Therefore, the design of a "packaged plant" by an engineer is analogous in all essential respects

AFWL-TR-69-121

to his selection and utilization of particular blowers, diffusers, sludge collectors, or pumps in the creation of a conventional basic biological treatment plant. (Ref. 1)

A letter from Hq PACAF dated 22 August 1968 (Appendix I) requested assistance in the area of sanitary treatment of domestic waste water in limited-war operations. The requirements stated were for a packaged treatment plant to serve 2,000 to 3,000 personnel, having the following criteria: transportability, availability, ease of erection, simplicity of operation and a biochemical oxygen demand (BOD<sub>5</sub>) reduction of 90 percent.

From January 1969 to July 1969, the Civil Engineering Branch of the Air Force Weapons Laboratory canvassed manufacturers of packaged waste water treatment plants. A "Product Questionnaire" (Appendix II) was sent to approximately 60 manufacturers. Included in those receiving the questionnaire were 12 manufacturers that had models of their product certified by the National Sanitation Foundation (NSF), Ann Arbor, Michigan. Eight of the firms responded with a copy of the official certification.

The manufacturers response to the questionnaire was very poor. A number of those firms filling out the form partially answered the different items. A few answered the questionnaire fully. Many firms sent their catalogues and data sheets on their various models without filling out the questionnaire and the data had to be extrapolated.

Information and data used as inputs to this report were obtained from four sources: (1) the "Product Questionnaire," (2) the NSF certification booklets, (3) the Journal of Sanitary Engineering Division, American Society of Civil Engineers, and (4) the manufacturers catalogues. Because the information had to be extracted from so many sources, exact comparisons of the various brands of plants was not made. The information is reported as obtained and presented for the reader to exercise his own judgment.

The National Sanitation Foundation is an independent testing agency, which has the responsibility to develop standard criteria to evaluate the performance of packaged sewage treatment plants. To aid the NSF in their work, the Demonstration Grants Committee (now a part of the Federal Water Pollution Control Administration) of the U.S. Public Health Service approved and gave the Foundation's application a high priority. Subsequently, the Foundation was given a grant, WPD-74, which afforded operating funds over a three year period. (Ref. 2) Fifteen firms sent models of their plants for performance testing in accordance with the Foundations standards. Of these 15 plants, the Foundation has certified 12 plants at the time of this writing. The certification data are the property of the manufacturer of the plant tested and these data can only be released or reproduced by his permission. The manufacturer has an agreement with the Foundation to present

the certification data in its entirety, whenever it is used in advertising, prospectus, bids or other similar uses.

Although most of the plants tested by the Foundation are low flow capacity plants (3,000 to 16,000 GPD), the NSF has determined through its criteria development program that larger plants of a similar design will produce equal or better results and smaller plants will produce somewhat lesser results than any given plant in the series. (Ref. 3)

Before the NSF assumed responsibility for certifying packaged plant performance, various state boards of health became alarmed at the increased use of packaged plants, and developed their own criteria to evaluate plant performance. The Florida State Board of Health was one which established its own criteria. The Board, in the mid-fifties, established conditions for experimental, extended aeration plants. It is interesting to note that one of the conditions was a satisfactory surety bond to be posted by the manufacturer. It was believed that the bond should cover the cost of the waste-water treatment plant so that if satisfactory performance were not obtained, the purchaser would be reimbursed to provide for purchase of another plant. The bonds were written to cover expected efficiency at a given flow and waste strength (usually 200 mg/l BOD<sub>5</sub> and 200 mg/l suspended solids). After a year of operation, the Board felt that sufficient data had been collected to lift the surety bond on four manufacturers' plants. (Ref. 4)

AFWL-TR-69-121

The Ohio University, Athens, Ohio, received a U.S. Demonstration Committee Grant to collect data from an oxidation ditch at Somerset, Ohio. Performance data were obtained over a nine-month period. (Ref. 5)



## SECTION II

### DEFINITIONS AND OPERATIONAL CRITERIA

The range of packaged plants, (Tables I and II) is from the size for a single residence (600 GPD) to very large plants of 3 million GPD flow capacity. The methods used for treatment normally are extended aeration and contact stabilization. The extended aeration models are made in sizes up to 100,000 GPD and the contact stabilization plants normally start at 50,000 GPD and up. Most extended aeration plants are preassembled at the factory, but the larger contact stabilization plants are field erected.

There are also other modified forms of the activated sludge process that are classified in the complete mix, longterm aeration group. For the purpose of this report they will be grouped in a class called "Special Devices."

I. Extended Aeration is defined as those total oxidation plants which are designed to maintain about 10 pounds of suspended solids under aeration per pound of average daily biochemical oxygen demand ( $BOD_5$ ) entering the aeration tanks. At such a high solids to  $BOD_5$  ratio, very little excess sludge is produced. (Ref. 2)

Table I. Summary of Commercial Extended Aeration Package Sewage Treatment Plants.

MANUFACTURER	MODEL DESIGNATION OR SERIES	TYPE PROCESS	FLOW CAPACITY (GPD)	REMARKS
Aer-O-Flo Corp.	Model "S"	Extended Aeration	1,000-100,000	Factory prefabricated 45 models
Can-Tex Industries	Tex-A-Robic (EA)	Extended Aeration	5,000-50,000	Factory prefabricated
Chicago Pump	Rated Aeration H-Shear	Extended Aeration	1,000-5,000	Factory prefabricated 3 models
	SL-131 Rated Aeration	Extended Aeration	17,500-37,500	Factory prefabricated
	SL-144 Completaire	Mixed Modification of Activated sludge	15,000-75,000	Factory prefabricated duplex up to 150,000 GPD
	SL-138 & SL-139 Rated Aeration- Stepaire	Step Aeration	100,000-500,000	Field erected
Dayco	6DA2-12DA40	Extended Aeration	2,000-40,000	
Defiance Company	1.65EA-40EA	Extended Aeration	1,650-40,000	Factory prefabricated Multiple unit for larger systems
Dorr-Oliver	CompleTreater		15,000-240,000	Uses Biofilter, Duo Clarigester screening and chlorination.
	CompleTreater- Aeration Plant	Extended Aeration or Contact Stabilization	100,000-500,000	Can be used with either method.

Table I. Summary of Commercial Extended Aeration Package Sewage Treatment Plants Continued.

MANUFACTURER	MODEL DESIGNATION OR SERIES	TYPE PROCESS	FLOW CAPACITY (GPD)	REMARKS
Dravo	Aeropak	Extended Aeration or Contact Stabilization	20,000-1,000,000	Sludge Digester used.
Fimco Corp.	Type AIX	Aerobic Digestion	2,000-1,000,000	
	Type ADR	Aerobic Digestion	1,000-15,000	
Infilco Incorporated	Accelo-Biox	Extended Aeration	7,500-300,000	Combination of mechanical and compressed air aeration
Lakeside Engineering Co.	Spira-Pac	Extended Aeration	Up to 60,000	
	Various Model Numbers	Extended Aeration & Contact Stabilization	2,500-3,000,000	
	Oxidation Ditch	Extended Aeration	10,000-3,000,000	
Lycos Systems Incorporated		Extended Aeration & Contact Stabilization	1,500-1,000,000	Multiple unit hook-up field erected.
Mack Sewage Treatment Systems, Incorporated	Mack	Aerobic Digestion	1,500-40,000	Add-on to increase capacity.
Marolf		Extended Aeration	2,000-21,000	Parallel add-on to increase capacity.
Neptune Microfloc Inc.	Recla-Pak	Extended Aeration	5,000-50,000	Increased capacity by parallel add-on.

Table I. Summary of Commercial Extended Aeration Package Sewage Treatment Plants Continued.

MANUFACTURER	MODEL DESIGNATION OR SERIES	TYPE PROCESS	FLOW CAPACITY (GPD)	REMARKS
Water Pollution Control Corp.	Mark I	Extended Aeration	2,000-35,000	Factory assembled
(Sanitaire)	Mark II	Extended Aeration	1,000-10,000	Factory assembled
Schmieg, Sydnor Hydor- dynamics	Centri-Swirl	Extended Aeration	1,000-100,000	30,000 GPD largest single unit
Smith and Lovelace	Oxigest A & B	Extended Aeration	6,000-35,000	Parallel add-on to increase capacity.
	Oxigest C & D	Extended Aeration	6,000-35,000	Parallel add-on to increase capacity.
	Oxigest CY Addifrest	Extended Aeration Extended Aeration	2,000-10,000 18,000-90,000	Field erected
Link-Belt	Contact-Pac	Extended Aeration	500-60,000	
Yeomans Brothers	Cavitette	Extended Aeration	Single Residence	Modified aeration
	Yeo-Wave	Extended Aeration	3,000-12,000	10 sizes
Permutit	Ameodyne Products	Extended Aeration & Contact Stabilization	1,000-30,000	23 sizes
Komline-Sanderson		Extended Aeration	Up to 500,000	
American Bousser Corp.	Oxy-Pak	Extended Aeration	1,000-300,000	W/"Aircomb" diffusers

Table I. Summary of Commercial Extended Aeration Package Sewage Treatment Plants Continued.

MANUFACTURER	MODEL DESIGNATION OR SERIES	TYPE PROCESS	FLOW CAPACITY (GPD)	REMARKS
American Radiator & Standard Corporation	Bio-Con	Extended Aeration	20,000-80,000	
Suburbia System, Incorporated	Suburbia	Extended Aeration	50-1500 homes	Pre-designed steel components

Table 11. Summary of Commercial Contact Stabilization Package Sewage Treatment Plants.

MANUFACTURER	MODEL DESIGNATION OR SERIES	TYPE PROCESS	FLOW CAPACITY (GPD)	REMARKS
Aer-O-Flo Corp.	Model "CS"	Contact Stabilization	50,000-500,000	Field erected, 46 models
Can-Tex Industries	Tex-A-Pobic (CS)	Contact Stabilization	30,000-50,000	Factory prefabricated
	Tex-A-Robic (RC)	Contact Stabilization	50,000-1,250,000	Field erected
Chicago Pump	SL-150 Stabilaire	Contact Stabilization	20,000-50,000	Factory prefabricated, duplex up to 100,000 GPD.
	SL-144 Completaire	Mixed Modification of Activated Sludge	15,000-75,000	Factory prefabricated, duplex up to 150,000 GPD.
	SL-138 & 139 Aeration Step Stabilaire	Contact Stabilization	100,000-500,000	Field erected
Fluoco	111Ac20-120Ac70	Contact Stabilization Contact Stabilization	20,000-70,000 50,000-500,000	Field erected
Defiance Company	20CS-10CS	Contact Stabilization	20,000-100,000	
Dorr-Oliver	CompleteTreater- Aeration Plant	Contact Stabilization or Extended Aeration	100,000-500,000	
Dravo	Aeropack	Contact Stabilization & Extended Aeration	20,000-1,000,000	Sludge Digester
Elmco	Type CSC	Contact Stabilization	20,000-1,000,000	

Table II. Summary of Commercial Contact Stabilization Package Sewage Treatment Plants Continued.

MANUFACTURER	MODEL DESIGNATION OF SERIES	TYPE PROCESS	FLOW CAPACITY (GPD)	REMARKS
Lakeside Engineering Co.	Various Models	Contact Stabilization & Extended Aeration	2,500-3,000,000	
Lycos Systems Incorporated		Contact Stabilization & Extended Aeration	1,500-1,000,000	Multiple unit add-on, field erected.
Water Pollution Control Corp.	Mark III	4 activated sludge process	80,000-2,000,000	Field erected
(Sanitaire)	Mark IV	Multi process	Up to 100,000	Field erected
Smith and Loveless	Oxigest R	Contact Stabilization	50,000-1,000,000	Field erected
Walker Process Equipment	Sparjair	Contact Stabilization	5,000-100,00	
Hays Process Company	Hays Submerged CA	Contact Stabilization	1,000-40,000	
Fermutit	Ameodyne Products	Contact Stabilization & Extended Aeration	1,000-10,000	23 sizes
Water and Sewage, Inc.	Nautilus	Contact Stabilization	Up to 10,000	

The basic features of all packaged extended aeration sewage plant are the aeration compartment and the final settling or clarification compartments shown in Figures 1 and 2.

Raw sewage flows directly into the aeration compartment without having been subjected to primary sedimentation. The raw sewage is mixed with the return sludge to form the mixed liquor within the aeration chamber and is aerated for approximately 24 hours. When the aeration period is completed, the mixed liquor flows into the sedimentation chamber where the suspended solids and liquids are separated by gravity. The separated solids are returned to the aeration compartment as returned sludge while the liquid flows out of the plant as the effluent.

Accessories that may be used are a bar screen, comminutor, sand filter, or a lagoon (to further stabilize the plant effluent before final disposal), and a chlorinator. Commonly included are foam control sprays and skimmers to remove floating material from the surface of the sedimentation compartment. (Ref. 2)

Table I includes the different sized treatment plants that utilize the extended aeration principle for treating domestic waste waters.

II. Biosorption or contact stabilization is defined as a form of the activated-sludge process where aeration is carried out in two phases in two types of tank: the contact tank where raw sewage solids




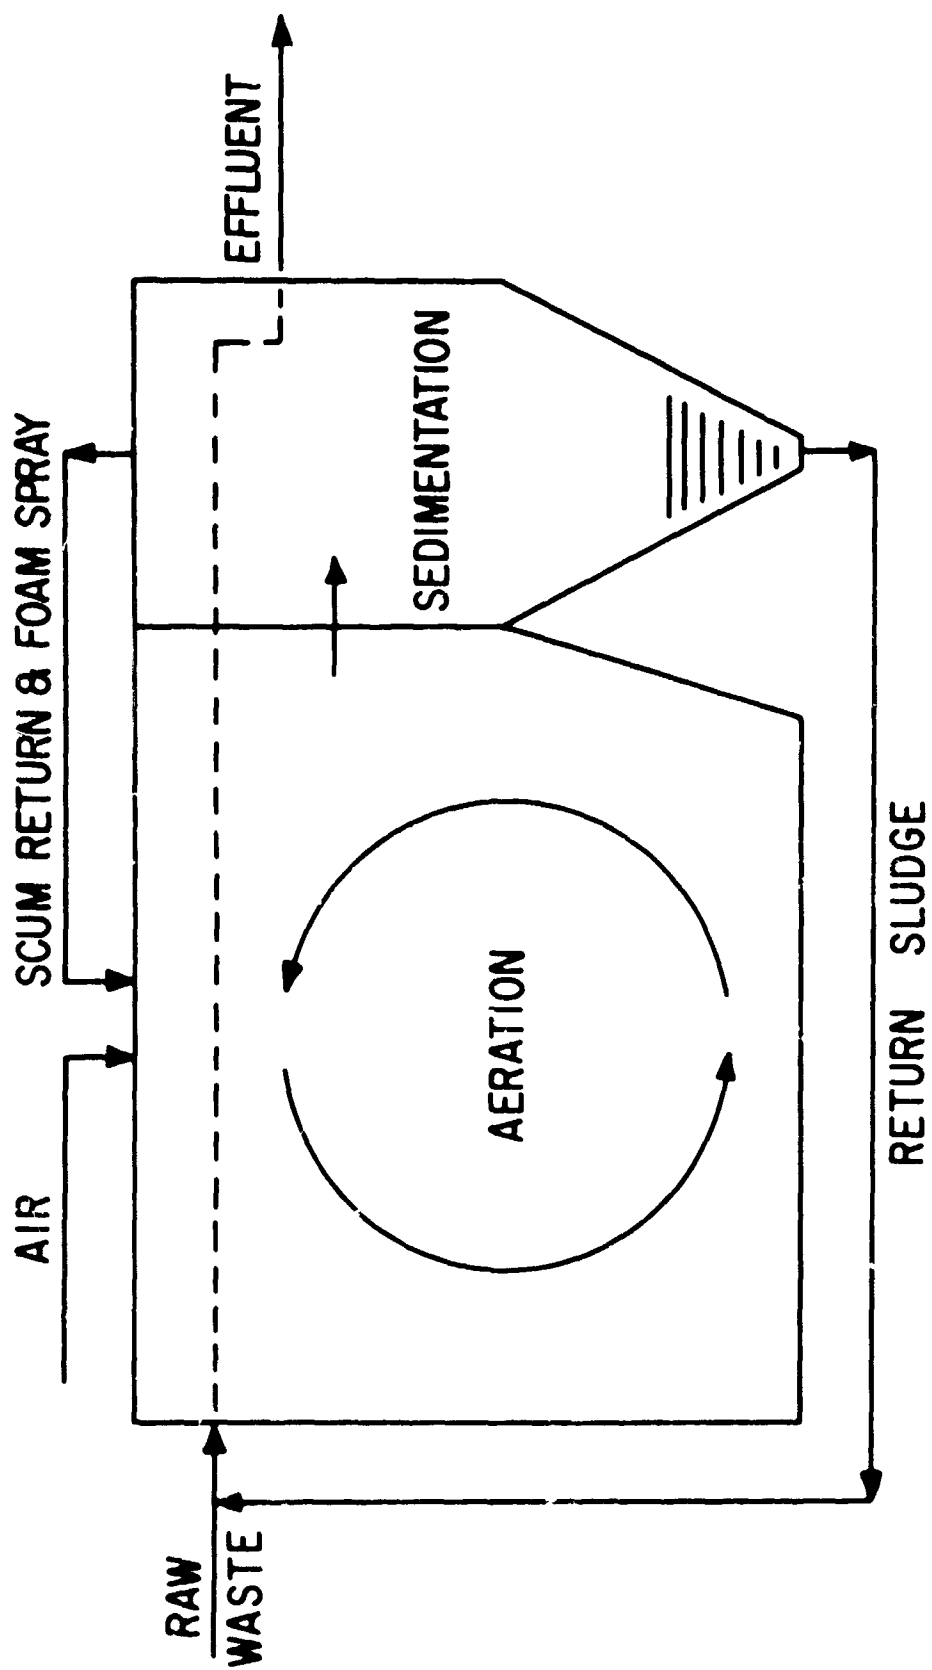


FIGURE I SIMPLE EXTENDED AERATION PLANT

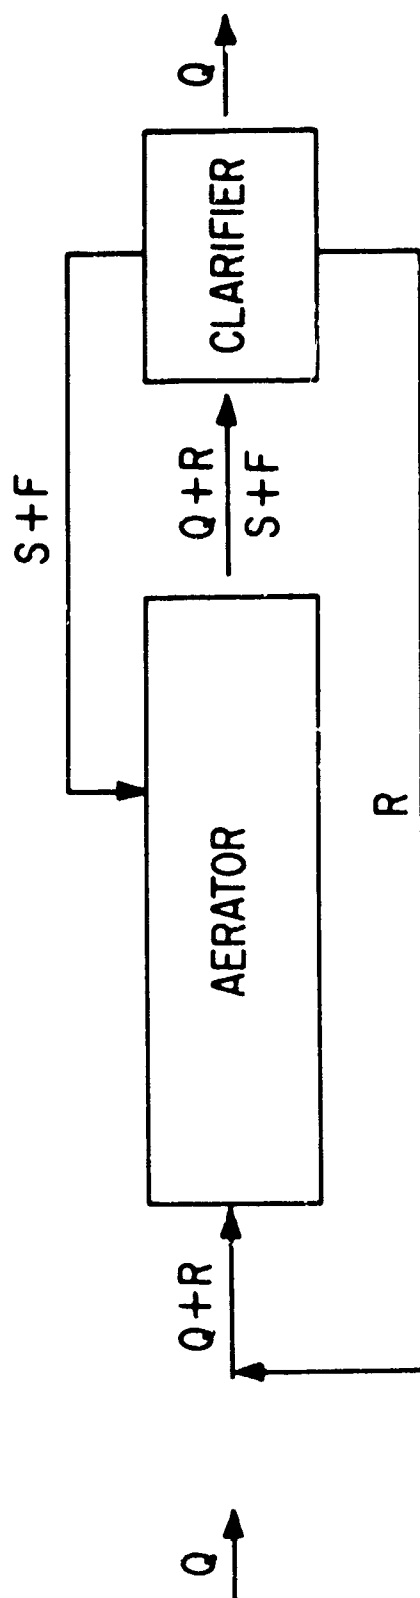

WHERE:  $Q$  = INFLUENT FLOW RATE  
 $R$  = RETURN SLUDGE RATE  
 $S$  = SCUM RETURN RATE  
 $F$  = FOAM SPRAY RATE

FIGURE 2 FLOW RATES, TYPICAL EXTENDED AERATION PLANT

are absorbed and adsorbed on the biomasses; and the stabilization tank where the solids which have been removed in a final settling tank are partially stabilized by reaeration before being recombined with the incoming raw sewage. An aerobic digestion tank may be included as a part of the process. (Ref. 6)

The contact stabilization plant process has three compartments under aeration. Raw sewage flows into the contact aeration compartment and is mixed at the entrance with reaerated or stabilized activated sludge. The mixed liquor is kept under aeration and remains in the contact aeration compartment for one-half to one and one-half hours, depending on the rate of flow of stabilized sludge into the compartment. The mixture then flows into the clarifier for sludge separation. A relatively clear effluent of low organic content flows over a clarifier weir. Settled sludge is collected from the bottom of the clarifier and returned to the stabilization compartment by an airlift pump. After four to six hours of aeration, it is again mixed with raw sewage flowing into the contact chamber. Not all the sludge collected in the clarifier is returned to the stabilization compartment. A portion of it is diverted to the third aeration compartment, an aerobic digester, where the volume of sludge is reduced by auto-oxidation. When facilities are provided for separating the digested sludge from the supernatant, the latter is returned to the stabilization compartment to be combined with the sludge

returned from the clarifier. Periodically some sludge has to be wasted from the digester. Figure 3 illustrates the flow through a plant using the contact stabilization method. Table II includes the different sized treatment plants that utilize the contact stabilization process for treating domestic waste.

### III. Special Devices.

1. The Oxidation ditch is a modified form of the activated sludge process, and may be classified in the complete mix, longterm aeration group. This is not a mechanically aerated lagoon because the settled solids produced by the process are continually returned to the ditch to provide a high solids concentration in the aeration basin. This process provides a simple, compact, rugged and virtually fool-proof plant that is capable of 90 to 97 percent reductions of BOD<sub>5</sub> and suspended solids.

Normally a primary settling tank is not used in the oxidation ditch process, shown schematically in Figure 4. Raw sewage passes directly through a bar screen to the ditch. The bar screen is necessary for the protection of the mechanical equipment such as rotors and pumps. The oxidation ditch forms the aeration basin where the raw sewage is mixed with active organisms. The rotor is the aeration device that entrains the necessary oxygen into the liquid in the ditch. The velocity of the liquid in the ditch must be kept above a minimum of approximately one

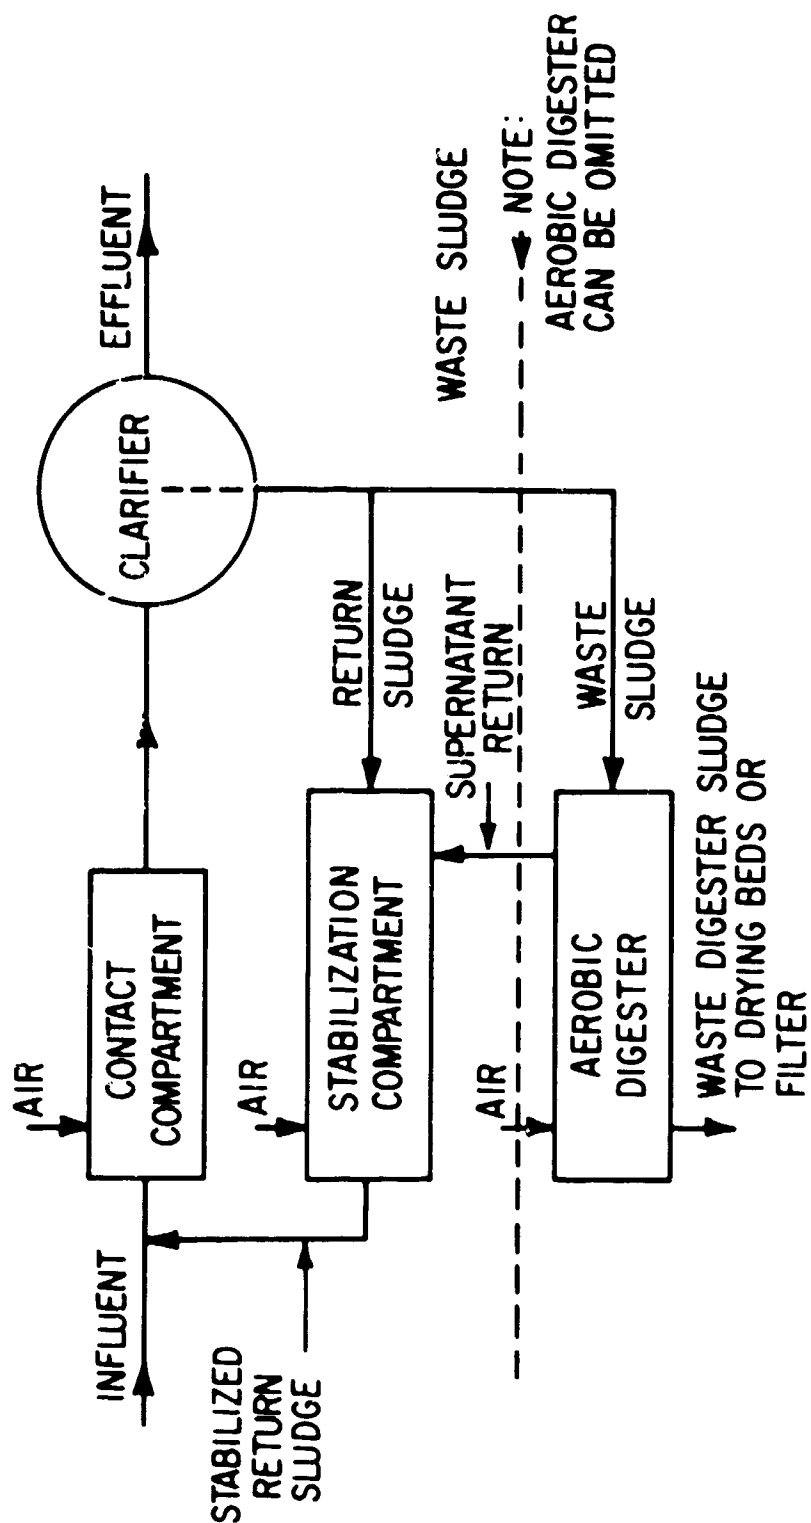


FIGURE 3. CONTACT STABILIZATION PROCESS FLOW DIAGRAM

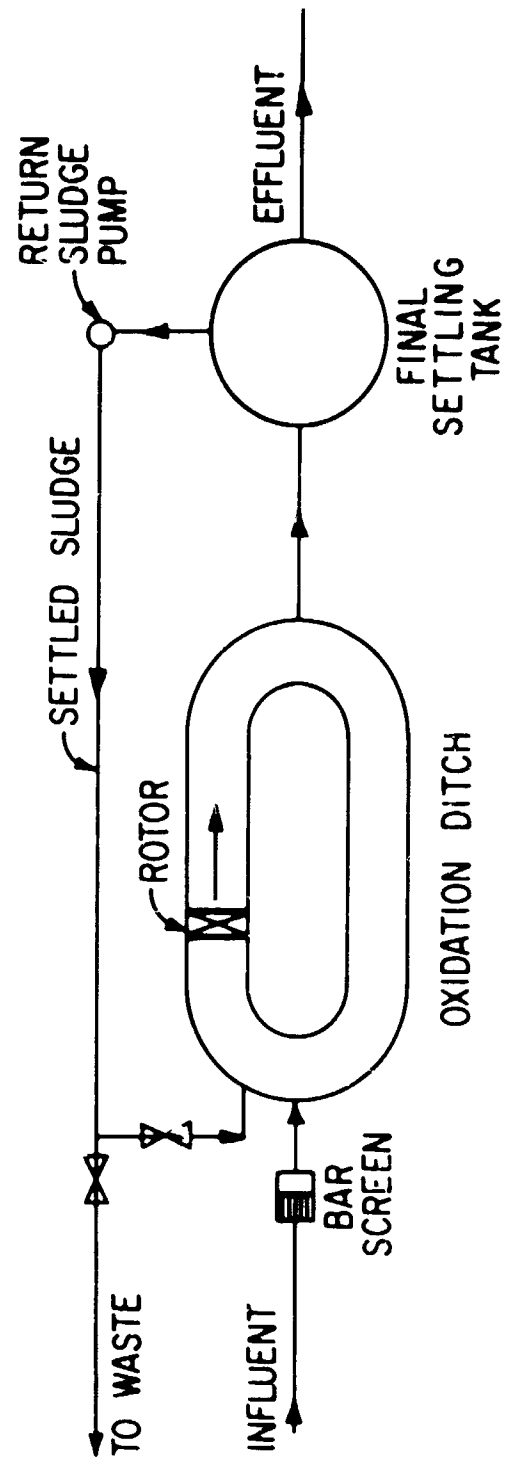


FIGURE 4. OXIDATION DITCH PLANT LINE DIAGRAM

foot per second to prevent settling of solids. The ends of the ditch must be well rounded to prevent eddying and dead areas, and the outside edges of the curves must always be given erosion protection.

The oxidation ditch is operated as a closed system and the volatile suspended solids will increase until it will be necessary to periodically remove some sludge from the process.

The compacted earthen ditch may be lined with poured concrete, plastic liners, shotcrete, asphalt, wood or preformed materials. Clay has also been used as a liner. (Ref. 5)

The process, with its longterm aeration basin, is designed to carry mixed liquor suspended solid concentration of 3,000 to 8,000 mg/l. This provides a large organism mass in the system. The food to organism ratio or loading factor is low, ranging from 0.03 to 0.1 lb. BOD<sub>5</sub>/day/lb volatile suspended solids. In addition, because of the low food to organism ratio, the growth of volatile sludge is relatively low because of endogenous respiration. The volatile sludge is less reactive and has a lower BOD<sub>5</sub> than equivalent weight of a sludge produced by processes having larger loading factors. Therefore, the solids lost from the system over the effluent weir in the final settling tank will have a lower BOD<sub>5</sub> than the same quantity lost from the system by other processes.

Developed from the oxidation ditch principle is the extended aeration aerotor plant. Figure 5, illustrates the flow diagram of this system.

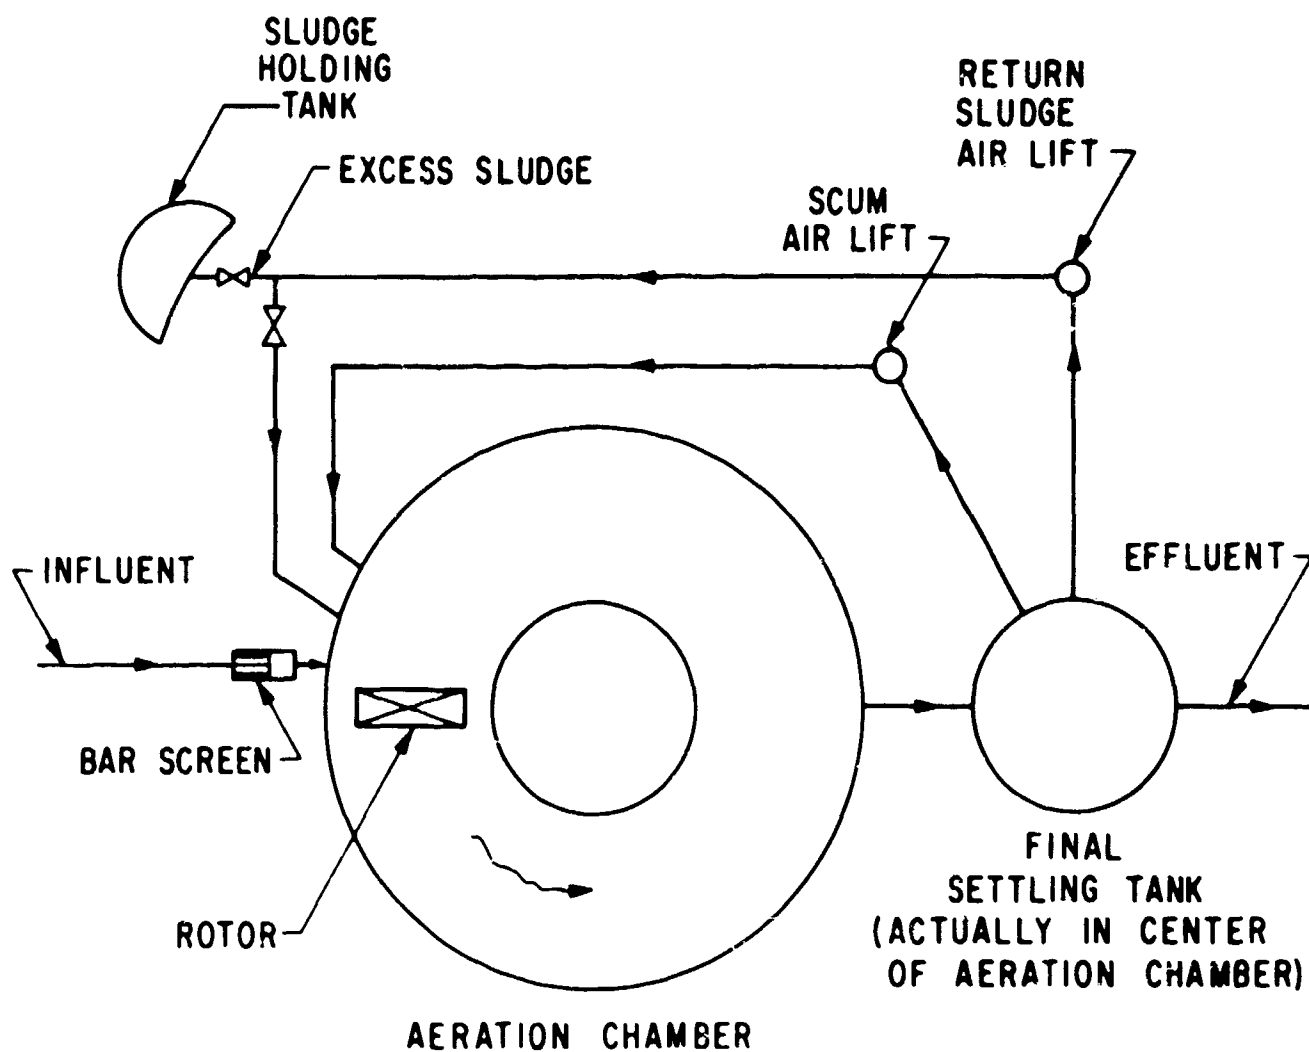



FIGURE 5 LINE DIAGRAM  
AEROTOR PLANT




The process utilizes a modified form of the activated sludge process and may be classified in the complete mix, longterm aeration group. The plant provides a simple, compact, rugged, odor free and virtually fool-proof operation that is capable of 90 to 97 percent reductions of BOD and suspended solids. The largest plant comes with a capacity to handle 1000 capita per day or 100,000 gallons per day. (Ref. 7)

2. Aerated Lagoon. This method is also feasible. A rotor supported by structural members could be used. A second configuration that could be used where electrical power is absent would be the use of an anchored raft powered by an outboard gasoline engine. The raft would be anchored to a pine column by the use of a swivel arrangement which would be located in the center of the lagoon. Figure 6 illustrates this method of aerating the liquid. The outboard engine and raft would travel in a circular motion inducing a circular motion to the liquor, while the outboard motor propeller adds the needed oxygen to the mixture. A trash trap would be used at the influent entrance to prevent foreign material from damaging the outboard motor or propeller.

3. Rotating Biological Contactor. This device can be considered a combination of the trickling-filter and the activated-sludge process. It exhibits a degree of flexibility and control over the biological process that may prove to be beneficial to the engineer and plant operator. The process is called the rotating biological surface (RBS) waste-water treatment.

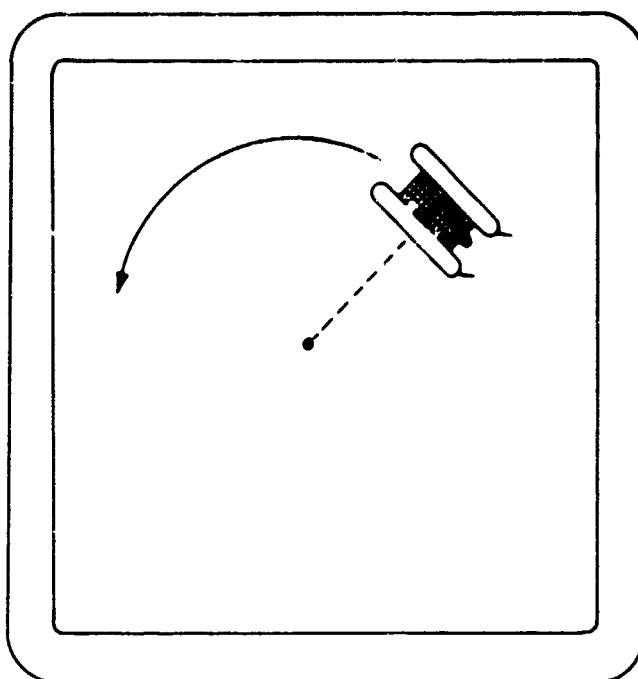

PLAN VIEW

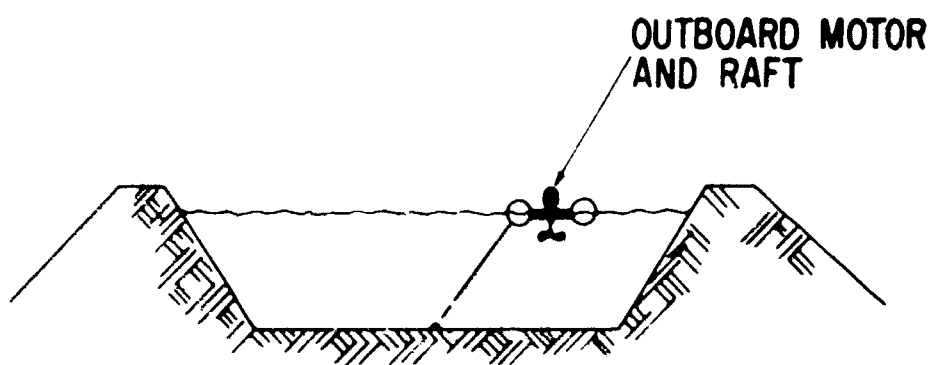

SIDE VIEW

FIGURE 6. AERATED LAGOON

Physically the RBS is a series of closely spaced vertical discs, mounted on a horizontally driven shaft. The shaft is supported by bearings and is slowly rotated by power equipment. The rotating shaft alternately dips the disc surfaces into the waste material and then into the air. Waste material continuously flows parallel to the discs. The waste level is slightly less than half the disc diameter. Intimate contact between the waste material and disc surfaces is provided by contoured tank bottoms.

During initial operations, a biomass colony is quickly established on the disc surface. These colonies of bacteria will continue to propagate (in the presence of adequate oxygen and food material) on both sides of the discs. The growth produced is a uniform mass which smoothly covers the entire disc surface. The RBS does not need to be seeded to establish the biological growth, providing the waste material is biodegradeable and has adequate nutrients. The biomass on the discs oxidizes the waste material into metabolic by-products and excess cell material. The treated water containing these solids is directed to a secondary clarifier for separation.

The wet surface on the biomass removes the oxygen from the air after rising from the waste material. The thin waste film on the surface is extremely rich in oxygen and contributes to the high organic and oxygen uptake of the biomass. The oxygen-rich film penetrates the biomass through mixing and diffusion into its innermost colonies. (Ref. 8)

The advantages of this type process are as follows: a) The retention time or volume of waste material retained is very short. Using domestic waste water, the retention time is less than 45 minutes to achieve a 90 percent BOD<sub>5</sub> reduction in the system. b) Bacterial density of the discs is between 18,000 and 30,000 PPM active organisms. c) The components of the RBS are relatively simple and inexpensive. d) Because the RBS discs are molded of low density expandable polystyrene material, they have a buoyancy of 60 pounds per cubic foot. The only power required to rotate the RBS is the power to overcome transmission efficiencies and bearing friction. e) Generally speaking, checking and changing transmission oil, and bearing and chain greasing is all that is required. f) One of the most important benefits of the RBS process is that it requires very little operator attention. g) The physical configurations of the RBS lends itself extremely well to process staging.

Since manufacturing procedures dictate modules, or packaged fabrication for economies, other advantages may be derived. Units of discs and shafts are shipped assembled. They may be shipped with or without their own tankage. Fiberglass, plastic lined tanks or precast concrete tanks may be supplied. The packaging concept will enable users to add units in increments as the demand requires. (Ref. 8)

#### IV. Summary.

Table III was produced from information furnished by the manufacturers on the "Product Questionnaire," and from the NSF certification

booklets. Reference 5 describes the observations of the Ohio University study and lists 20 random dates of sampling of the oxidation ditch effluent over a nine-month period. Recorded under the oxidation ditch column are the averages of the 20 samplings. The data shown under the columns of the NSF tested plants are averages of tests made every day over a period ranging from 29 days to 39 days.

Table IV was developed from the ASCE Journal concerning tests conducted by the Florida State Board of Health. The sampling was conducted at random dates over a period of one year. The data shown in the table are averages. These data are not comparable since influent loadings and testing conditions differ, sampling methods are unknown, and actual tests performed on the effluent are unknown. Nevertheless, the resultant averages illustrate that the performance of the treatment plants in most cases produces approximately a 90 percent reduction in BOD<sub>5</sub> and suspended solids.

Appendix III is a list of firms that manufacture packaged waste water treatment plants. It is fairly complete but by no means all inclusive. It was not the author's intention to omit any industrial concern.

Table III. Package Treatment Plant Performance (Averages)

PERFORMANCE	MANUFACTURERS														
	+Lakeside Engineering Corp.	Oxidation Ditch	Aerator Plant	+Emco Model 15	+Neptune Micro Flocc	+Dorr-Oliver, Inc.	*Chicago Pump, Hydrodynamics Division	*Can-Tex Industries	*Aer-O-Flo Corp.	*Davco Manufacturing Corp.	*Smith & Loveless	*Lyco Systems, Inc.	*Water Pollution Control Corp. (Santitair)	*Mack Vault Company	
BOD <sub>5</sub> (Mg/l)	226	200	200	200	200	240	174	145	128	145	145	138	144	145	
Influent	7	10	10	20	3	5	14	6	14	6	8	9	16	13	
Effluent	98	94	94	90	98	98	90	96	89	96	95	93	96	91	
% Reduction															
Suspended Solids (Mg/l)															
Influent	326			200	220	250	175	165	157	176	176	170	165	176	
Effluent	5			30	5	0	20	10	15	13	14	12	13	16	
% Reduction	96			85	98	100	88	94	91	93	92	93	92	91	
Volatile Solids (Mg/l)															

Note: + Answered the Questionnaire  
 # Independent Test According to STM of WW 12th Edition - 6 month test duration  
 \* NSF Certification - 5 week test duration

Table III. Package Treatment Plant Performance (Averages) (Continued)

Influent	100	100	155	140	127	130	122	137	140	127	137
Effluent	10	10	0	15	7	11	9	10	9	8	11
%Reduction	70	70	100	89	95	92	93	93	93	94	93
$\text{NH}_3\text{-N}$ (Mg/l)											
Influent	33	10	20	16.4	15.8	13.8	16.3	16.3	14.9	15.8	16.3
Effluent	.1	1	1	1.1	1.1	0.7	0.7	1.1	1.1	0.8	0.9
%Reduction	99	70	95	93	93	97	96	93	92	95	95
$\text{PO}_4\text{-R}$ (Mg/l)											
Influent		30	8	51	50	41	52	51	43	51	51
Effluent		27	7	35	36	29	36	35	29	37	35
%Reduction		10	12	32	27	30	31	33	32	27	32
COD (Mg/l)											
Influent		300		700	306	315	276	302	315	300	302
Effluent		30		54	53	38	37	50	44	45	37
%Reduction		90		92	83	88	87	83	86	85	71
pH											
Influent		7.0	7.5	7.3	7.4	7.4	7.3	7.3	7.6	7.4	7.3
Effluent		7.0	7.0	7.2	7.3	7.4	7.1	7.1	7.8	7.4	7.1
Flow Capacity (1000 GPD)	287	-	3	-	9	5	10	2	6	16	5
Number of Tests	20	-	42	-	39	30	34	34	31	29	34

Table IV. Plants Tested by the Florida State Board of Health.

Manufacturer and Test Location	Performance												Flow Capacity (1000 GPD)	Number Tests
	BOD <sub>5</sub> (ppm)	Influent	Effluent	%Reduction	Suspended Solids (ppm)	Influent	Effluent	%Reduction	Settle Solids (ppm)	Influent	Effluent	%Reduction		
Marolf - Yocum Battery Plant, Tampa	181	18	90	114	32	73	.75	.07	91	7.8	6.7		9	6
Chicago Pump - South Gate Subdivision Fla.	172	11	94	179	46	75	6.0	.1	99	6.9	7.2		60	6
Veetmans Bros. - Castaways Motel, Miami Beach Fla.	373	109	71	269	97	65	7.1	1.5	80	7.0	6.9		20.5	11
Waller Process - Anacapi Motel, Fort Lauderdale Fla.	345	31	92	333	66	81	22.9	.35	99	6.9	7.2		25	12
Smith & Loveless - DeSoto Lakes Mobile Homes Broward County, Fla.	306	44	86	218	39	82	11	.5	96	7.8	7.3		20	21



### SECTION III

#### DISCUSSION

The manufacturers who completed the "Product Questionnaire" or who furnished catalogues supplied answers to the general questions needed to provide a more complete picture of their packaged treatment plant.

With the exception of the gasoline-powered aerator, all plants require either 110 or 220 volt electrical power. The power furnished by a specific base in a particular locale would be a design problem and requirement of that base. Figure 7 compares plant size in 1,000 gallons per day versus operating power in kilowatt hours.

Shipping volume varies greatly with the type of plant that has been selected. Figure 8 is furnished to indicate the volume required when planning to transport a prefabricated or sectionalized plant. Shipping of a plant has its problems. The Santa Fe Railroad's local office in Albuquerque was contacted for information concerning clearance widths and heights allowable for transportation of bulky hardware. The maximum allowable width in a boxcar is eight feet and the height allowance is so low that it precludes the boxcar for shipping a packaged treatment unit. A flatcar can handle a height of twelve to thirteen feet and a width of eleven feet. This is ample to transport most sections of a treatment plant. Figure 9 illustrates expected shipping weights per 1,000-gallon per day plants.

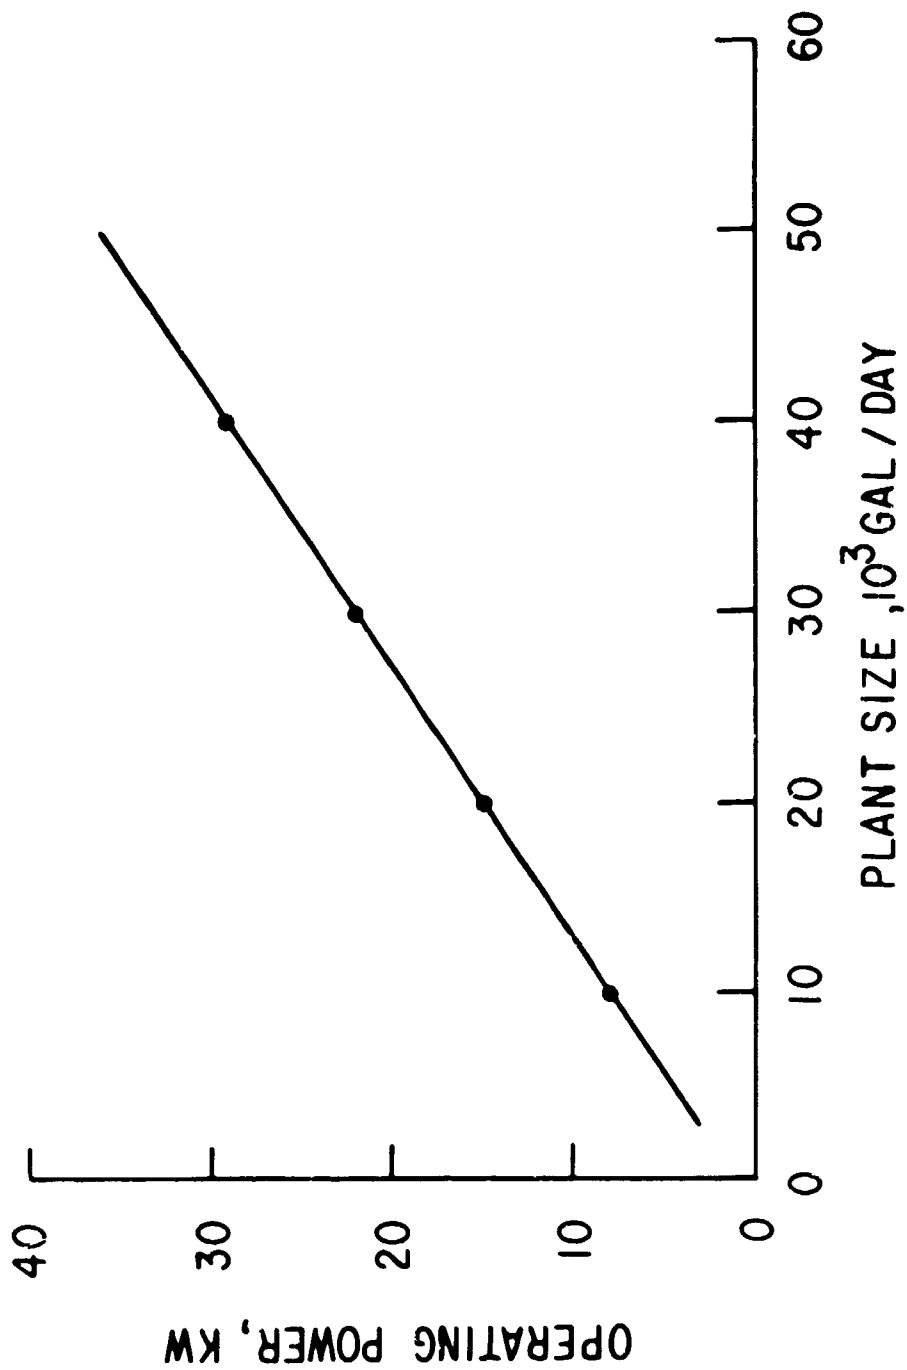


FIGURE 7 PACKAGE WASTE TREATMENT  
OPERATIONAL POWER REQUIREMENTS

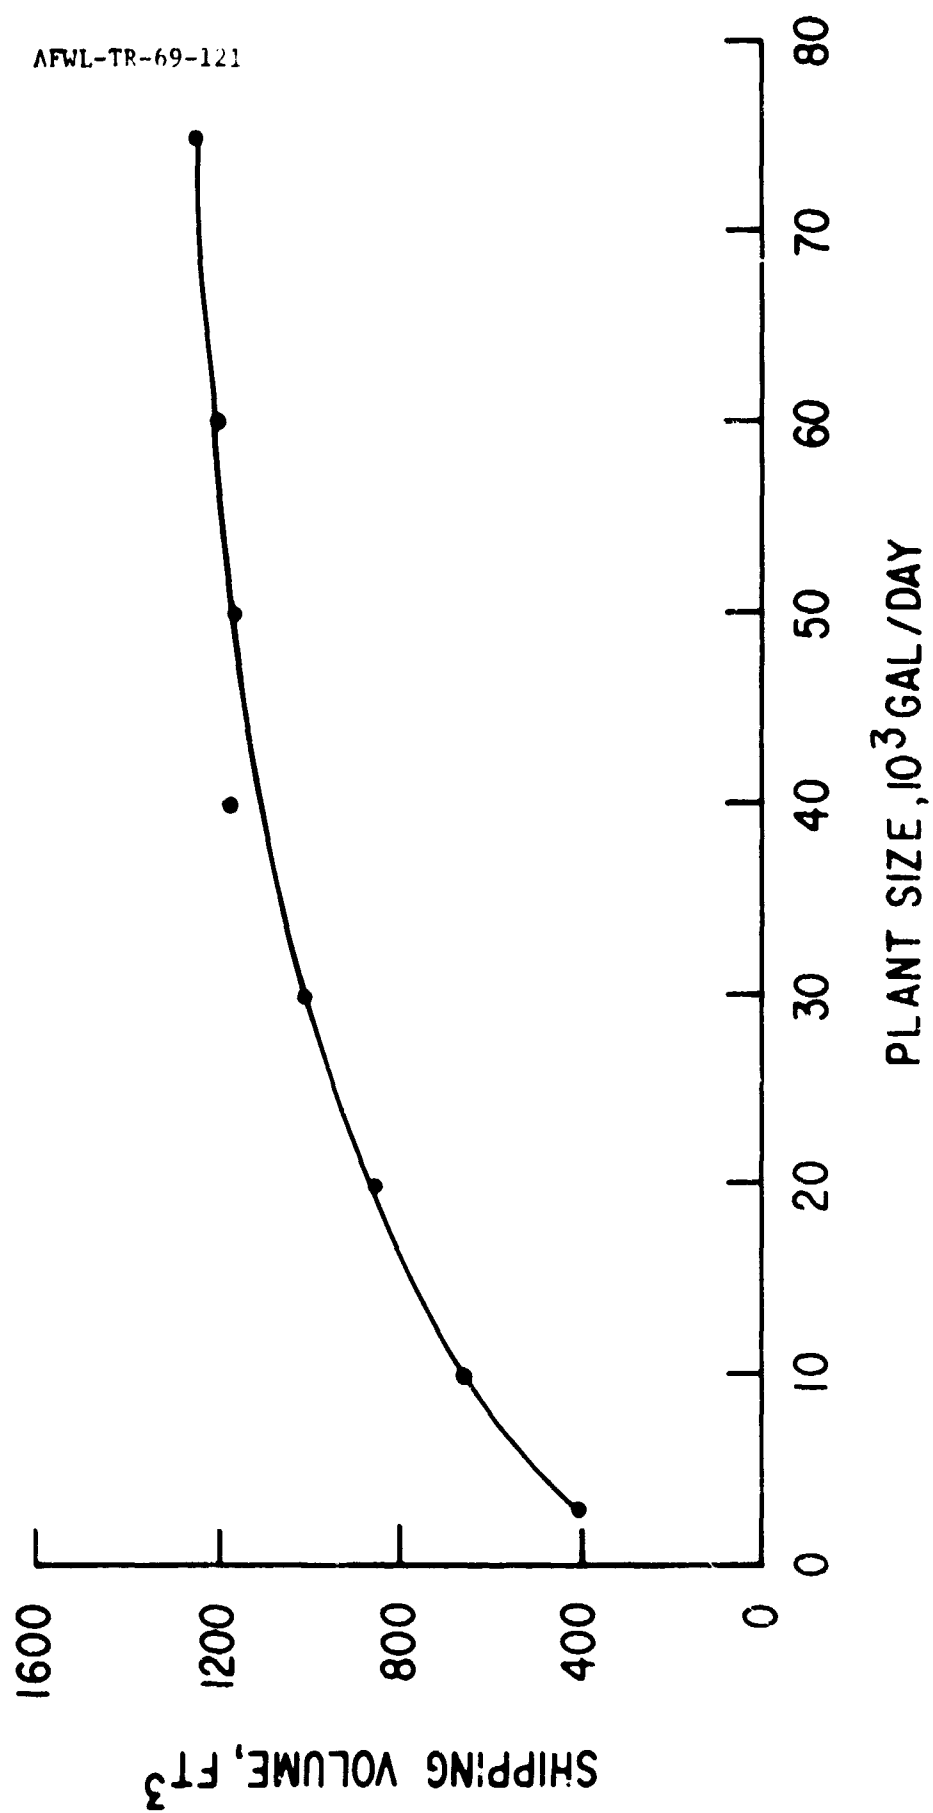


FIGURE 8 SHIPPING VOLUME, FT<sup>3</sup>

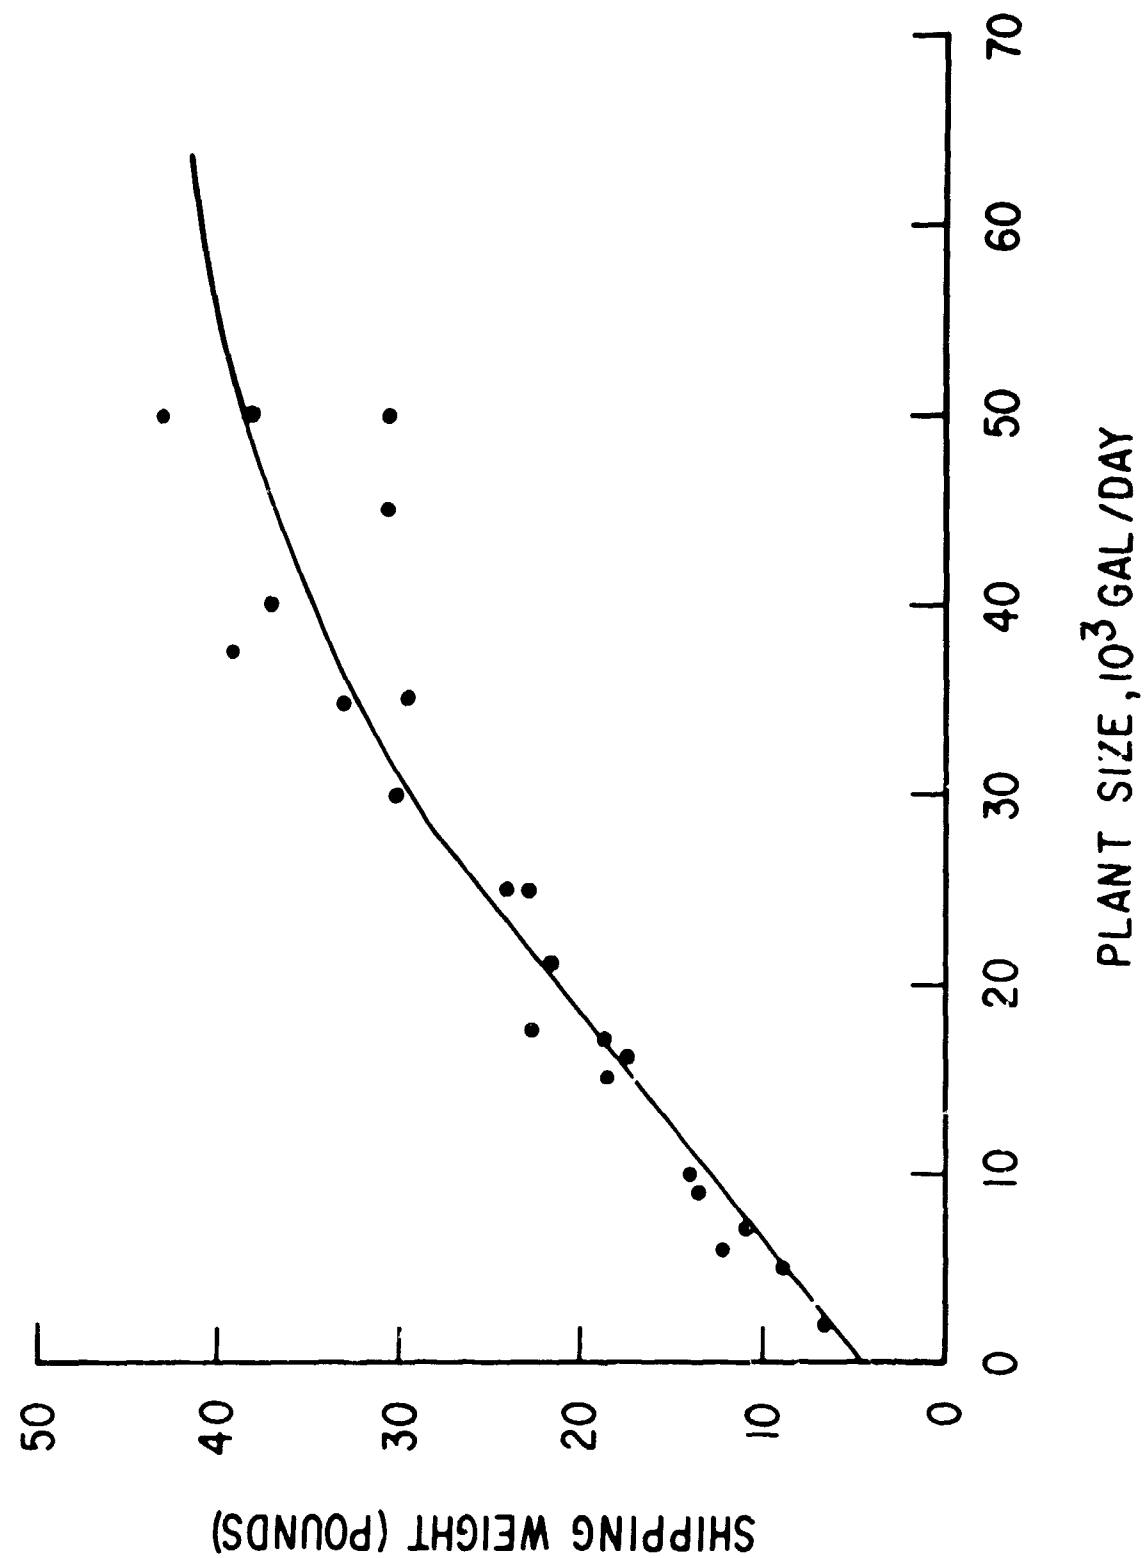


FIGURE 9 SHIPPING WEIGHT OF PLANT

One manufacturer states, "because of shipping limitations of regulatory authorities on overall size of truck and rail shipments, it is necessary to ship several items of equipment or unit assemblies unmounted to avoid exceeding height or width limits."

The rotor and support structure for the oxidation ditch and rotating disc are not included in Figure 8. They would occupy a much smaller volume and area than the extended aeration plants. The volume curve flattens out considerably as the larger capacity plants are approached. The larger plants are fabricated in sections for field erection and would take less shipping space or volume ratio to capacity than the smaller extended aeration plants which are prefabricated at the factory.

All the plants require some concrete foundation work. The oxidation ditch and the rotating disc aeration plants require concrete pads to support the rotor or discs and their supporting structure and a foundation pad if a clarifier is used. Both the extended aeration and contact stabilization plants normally require a concrete foundation or pad. Usually the manufacturer will recommend the necessary type of foundation required for a particular plant.

Figure 10 illustrates the estimated cost of an installed treatment plant versus plant size. The oxidation ditch and rotating disc costs are

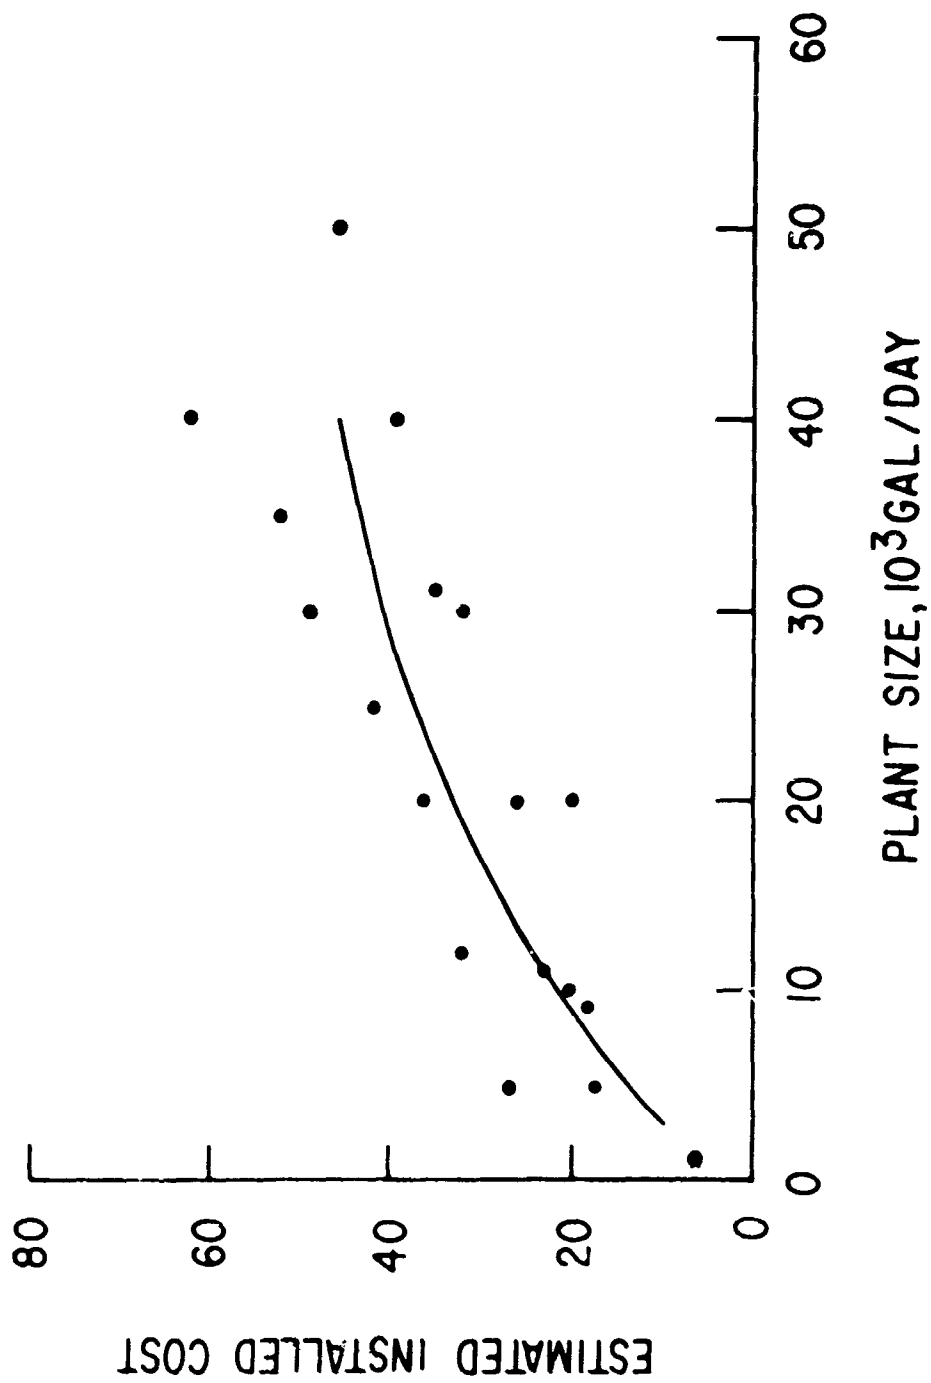


FIGURE 10 PACKAGE WASTE TREATMENT  
CAPITAL COSTS

AFWL-TR-69-121

not included in figure 10, but table V illustrates actual contractor bid proposals for construction, over a cross section of the United States.

Table V

Oxidation Ditch Construction Cost Figures. (Ref. 5)

	DESIGN POPULATION	CONTRACTOR'S BID * \$	\$ COST PER CAPITA
Godley, Texas	500	22,500	45.00
Graford, Texas	600	26,500	44.20
Morrison, Colo. **	700	27,000	38.60
Blossom, Texas	1,000	27,000	27.00
West Salem, Ohio	2,000	70,656	35.33
Laurel, Nebraska	2,000	65,600	32.83
Stayton, Oregon	3,500	74,402	21.20
Glenwood, Minnesota	4,300	69,000	16.00
Fort Stockton, Texas	12,500	167,500	13.40
* Excludes the cost of land, legal and engineering fees.			
**Bid but not built.			

Under normal conditions, the construction costs of the oxidation ditch type plant is 20 to 33 percent below that normally expected for other treatment plants capable of producing an effluent equivalent to the oxidation ditch process.

#### SECTION IV APPLICATIONS

All the curves presented in the previous sections are common to each other on the basis of flow capacity. The manufacturers design their "packaged" treatment plants on a factor of 100 gallons per capita per day. Air Force Manual 88-11 lists 85 GPCD for fixed installations and 100 GPCD for permanent installations. In limited-war areas the design factors could be less than that used for fixed installations.

One of the questions asked on the "Product Questionnaire" was whether the mechanics needed any special training to erect a treatment plant in the field. Those that answered the questionnaire stated that specific training in erecting a treatment plant was not required. It is a logical assumption that the artisans are skilled in their trade. Military "Red Horse" or "Prime BEEF" teams should have the skill to erect such a plant. Erection instructions as well as operating instructions are furnished with each plant. Figure 11 is included to illustrate erection time versus plant size.

The operators of the plants do require some training in plant operation. In most cases the company furnishing the plant will send a representative to instruct an operator on the peculiarities of a



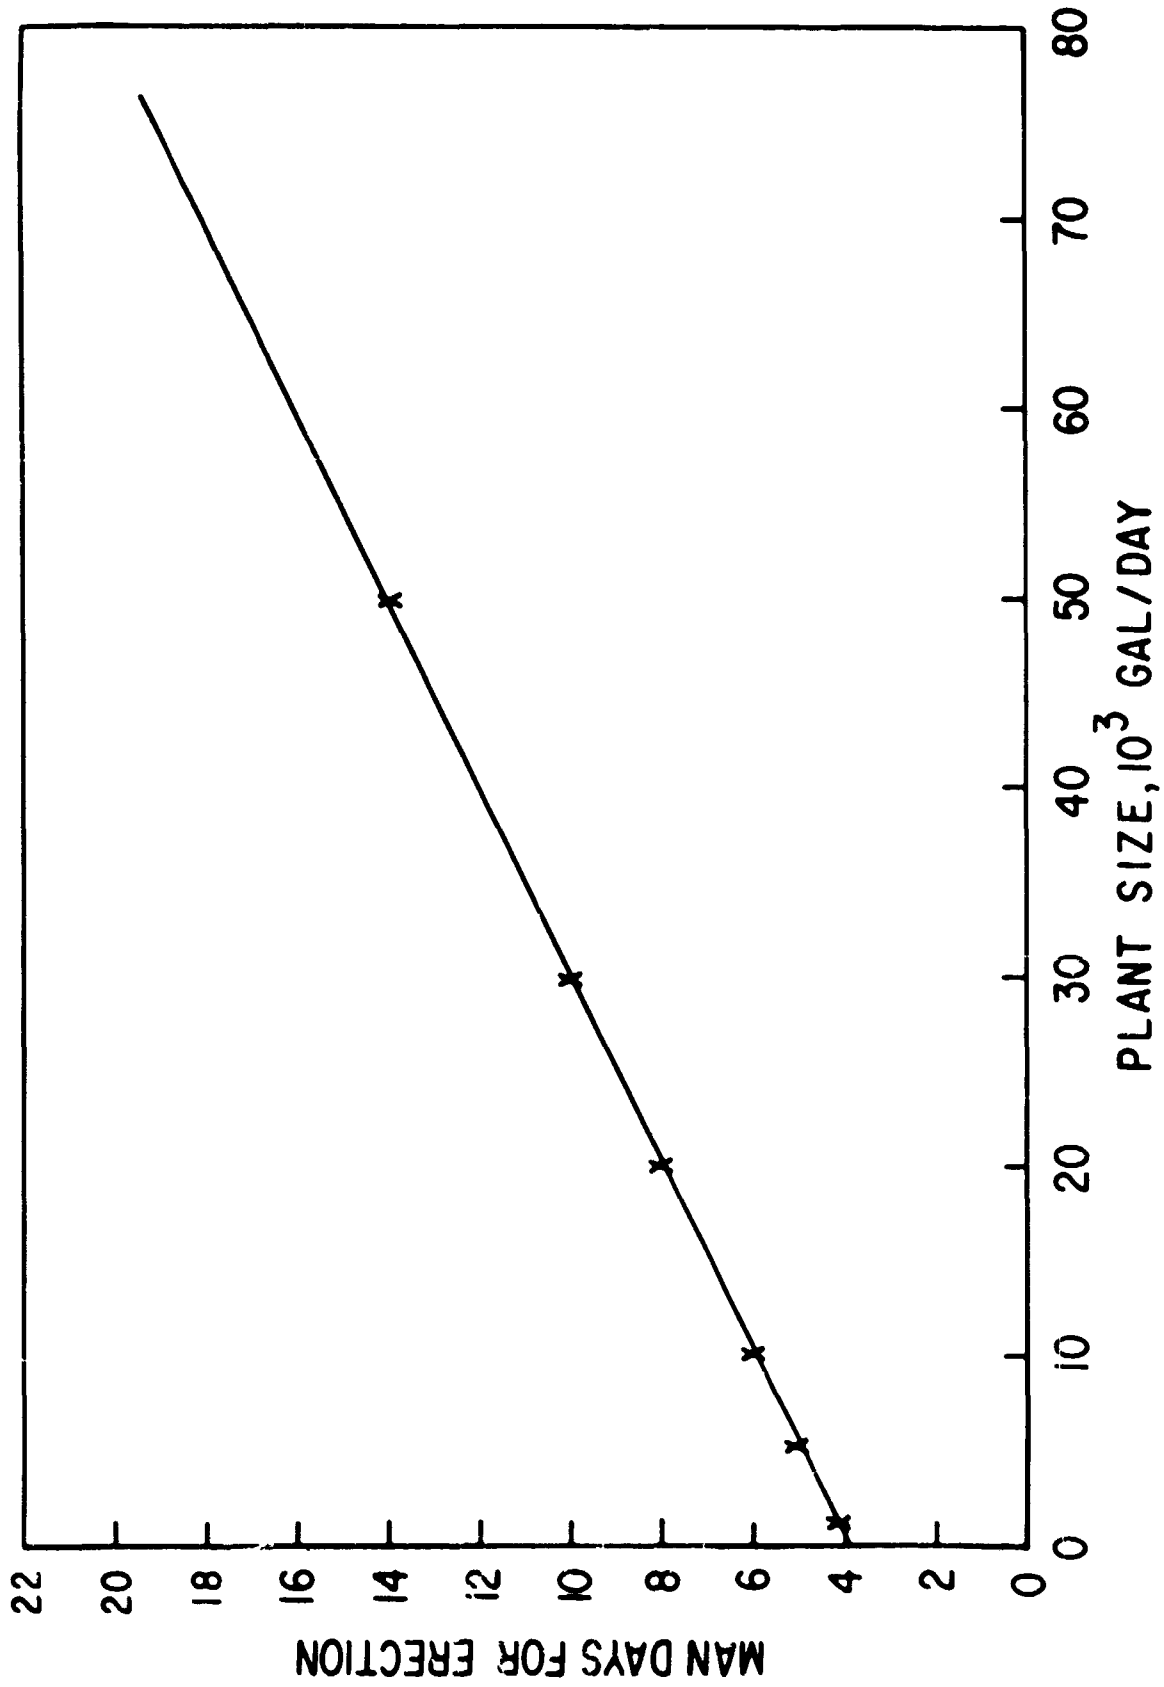


FIGURE 11 PLANT ERECTION TIME

AFWL-TR-69-121

specific plant. The operation of a contact stabilization plant is more complex than that of an extended aeration plant.

In planning to use any type of process mentioned in this paper, consideration must be given to the periodic removal of sludge. Each plant in time will require some sludge removal; therefore, an area for sludge drying beds should be included in the design. Because the aeration process produces less overall sludge, the drying beds need not be as large and extensive as those used in a conventional treatment system.

In transporting any of the plants, regardless of capacity, certain portions of the plant are disassembled for crating and handling. Usually these are portions of the superstructure that protrude above the tank structure. In any event, some assembly at the construction site is required. From the review of literature it has been found that a treatment plant can be found to satisfy the needs of almost any population requirement which exists. Plants can be found to serve a population which produce 200,000 to 300,000 gallons per day by using smaller plants in parallel. A splitter box device would be used in conjunction with the smaller plants directing the flow of waste water equally. An effluent collection system would then be used with a single disposal pipe to the final effluent receiving stream.

AFWL-TR-69-121

The "packaged" treatment plant can produce a high quality effluent. The effluent from these plants, no matter what process is used, usually contains less than 10 percent of the influent BOD<sub>5</sub>. Such plants have been successfully used in many small communities and also in many industrial waste applications. They may be used in dense population areas in military cantonments. By dispersing smaller plants to various high density areas of an installation, the need for a large capacity single plant serving the base is reduced.

The Air Force is represented on the National Sanitation Foundation's steering committee by a member of the Civil Engineering Branch of the Air Force Weapons Laboratory. The Air Force's needs and requirements will be presented through this representation at the NSF.

AFWL-TR-69-121

APPENDIX I

Copy of letter from Department of the Air Force  
Headquarters Pacific Air Forces Director of Civil Engineering

DEPARTMENT OF THE AIR FORCE  
Headquarters Pacific Air Forces  
APO SAN FRANCISCO 96553

Reply to  
Attn Of DCE/SG

Subject: Improved Utilities Systems for Extended Contingency Operations

To: HQ USAF (AFOCE/AFMSG)

1. The timely provision of adequate utilities systems is the most unresponsive area we have encountered in supporting extended contingency requirements in SEA over the past four years.
2. Our reaction time for vertical facilities has continually been improved by the use of pre-engineered structures and other transportable shelters. A quantum jump in this area has been realized through the development of modular dormitories, officers' quarters, crew quarters, dining halls and hospital facilities. On the other hand, package utilities systems to support such a buildup or for intermediate length deployments have seriously lagged in development. Once initial deployments are supported through the use of Army type field equipment, i.e., field erdalators, burn buckets, etc., no intermediate, quickly erected package systems for water and sewage treatment are available. As a result, conventional brick and mortar plants must be programmed and constructed from "scratch" to satisfy the longer term needs. Meanwhile, the initial field "lashups" are simply expanded by any means possible to support the constant growth that invariably takes place. This has been and is a matter of grave concern to the Medical Service due to high endemicity of enteric disease.

3. The need clearly exists for development of packaged plants for water and sewage treatment that are similar in concept to the modular/relocatable approach so successfully used for vertical facilities. This approach is already being taken for power generation to eliminate the need for time-consuming and unresponsive construction of stationary base power plants. Such an approach to water and sewage will eliminate the need to build conventional facilities for theater of operation environments, except where it is known that major bases will continue in service for periods of well over five years. Even in this case, the package units will provide timely interim treatment to meet established medical standards during the long lead time associated with conventional design and construction.

4. Our experience in programming, designing and constructing conventional water and sewage systems in SEA has clearly established that, in spite of the best planning, excessive lead times do exist. This is true because of a variety of reasons such as:

a. Design and construction are far more specialized and complex than for most other base facilities.

b. Many of the components for conventional systems are not readily available off the shelf.

c. The ability to "get by" with temporary field lashups often causes these vital utilities to be slipped in favor of items that are readily attainable and seem more closely associated with the mission.

d. Cost escalation tends to eat up funds reserved for utilities as while these are only in the design stage, other facilities are being completed.

5. As a base is developed and expanded over an extended period, new missions with dramatic impacts on base population become a way of life. This coupled with the increasing numbers of Local National employees causes water and sewage treatment to become more and more critical from a public health point of view - both as concerns the protection of the on-base population and the surrounding communities. Basic field sanitation practices at a fixed installation can only be effective for a limited period of time without dangers of the health hazard rising sharply. To forestall this undesirable situation in future deployments, we propose that research and development be initiated on the following:

a. A package water plant that can treat water from a surface source equivalent to the obtained by conventional treatment means. Both prechlorination and postchlorination provisions are essential. With separate detention, this same plant can be expected to adequately treat iron-bearing ground water which is a common requirement. Each package unit should be designed to support a set number of personnel consistent with transportability to the site and erectability on the site. As

AFWL-TR-69-121

populations increase, a package unit is simply added to the system when appropriate. Our experience in SEA indicates that a single package to support approximately 2000-3000 personnel is highly desirable. This type of a unit would have put us in business for a considerable period of time at all SEA bases. Even today, two to three package units in this order of magnitude would handle most bases. The package plant should be designed to be aggregated from readily available components or as a pre-engineered package developed by industry. The ability to relocate the equipment should be a consideration, but based on our experience in SEA, not an overriding one. In summary, what we need is a product either prepositioned or available in a timely fashion that can be readily transported overseas, erected with a minimum of specialized know-how and operated by personnel with normal training in career field AFSC 563XC.

b. A package sewage plant that parallels the above is also required. The package sewage plant should be developed to provide approximately 90 percent reduction of the biochemical oxygen demand in airbase sanitary sewage. Unit capacity should if practical be on the same basis as that provided for water plants. Again, availability, transportability, ease of erection, and simplicity of operation are the key points to be considered in a package sewage treatment unit.



AFWL-TR-69-121

6. Request a formal development program be initiated with industry to achieve a package water and sewage treatment plant capability as outlined above. We believe such a development is a key element to timely, orderly and safe development of bases in the theater of operations.

FOR THE COMMANDER IN CHIEF

ARCHIE S. MAYES  
Brigadier General, USAF  
DCS Civil Engineering

APPENDIX II  
PRODUCT QUESTIONNAIRE

1. Trade name and/or models designation.
2. Population capacity and gallon per day capacity.
3. Cost per unit.
4. Weight of plant assembled.
5. Shipping floor area and volume.
6. Dimensions of assembled unit or units.
7. Is plant pre-assembled?
8. Does manufacturer assemble plant? If customer assembled, do the mechanics require special training?
9. How many man days required for assembly?
10. Foundation requirements.
11. Power requirements (frequency and wattage - 50/60 or 400 cycle).
12. Modular or add-on capabilities. Can units be placed in series to increase capacities?
13. What treatment process is used?
14. Type chemicals used in treatment process or trade name of product. Quantities required per mgd treated.

AFWL-TR-69-121

MANUFACTURER'S PERFORMANCE DATA

	Influent	Effluent	% Reduction	Test Procedure and Duration
BOD (mg/liter)				
Suspended Solids (mg/l)				
Volatile Solids (mg/l)				
NH <sub>3</sub> -N (mg/l)				
PO <sub>4</sub> -P (mg/l)				
Total Organic (mg/l)				
Carbon (mg/l)				
COD (mg/l)				
pH				

APPENDIX III

- |  |   |
|--|---|
| 1. +Aer-O-Flo Corporation<br>P.O. Box 223<br>Florence, Kentucky 41042                                      | 2. American Bowser Corp<br>100 N. Broadway<br>Aurora, Illinois 60505  |
| 3. American Schreiber Co.<br>R.D.2<br>Red Lion, Pa. 17356  | 4. Beloit Corp., Jones Div.<br>Box A<br>Pittsfield, Mass. 01201   |
| 5. Brennan Chemical Co., Div.<br>of Costello Manufacturing Co.<br>704 N. 1st St.,<br>St. Louis, Mo., 63102 | 6. Brink Equipment Engineering Sales<br>Inorganic Chemicals Div.<br>800 N. Lindbergh Blvd.,<br>St. Louis, Mo. 63166 |
| 7. +Can-Tex Industries, Div of<br>Harsco Corp.<br>P.O. Box 340<br>Mineral Wells, Texas 76067               | 8. +*Chicago Pump, HYDRODYNAMICS Div.<br>FMC Corporation<br>622 W. Diversey Parkway<br>Chicago, Ill. 60614          |
| 9. +Clow Corp.<br>201 N. Talman Ave<br>Chicago, Ill. 60680   | 10. Colt Industries, Inc.<br>1290 Avenue of Americas<br>New York, New York 10019                                    |
| 11. Crane Co.<br>4100 S. Kedzie Ave.,<br>Chicago, Ill. 60632   | 12. Cromar Co., Cromarglass Div<br>P.O. Box 178<br>Williamsport, Pa. 17701  |
| 13. +Davco Mfg. Co.<br>1828 Metcalf Ave.<br>Thomasville, Ga. 31792   | 14. Deady Chemical<br>3155 Fiberglas Rd.<br>Kansas City, Kan. 66115   |
| 15. +Defiance Company<br>Division of Daveo Industries<br>P.O. Drawer 186<br>Tallevast, Florida 33588       | 16. De Laval Separator Co.<br>350 Dutchess Tpke<br>Pough Keepsie, New York 12602                                    |
| 17. Dravo Corp<br>One Oliver Plaza<br>Pittsburg, Pa. 15219   | 18. *Dorr-Oliver, Inc.<br>77 Havemeyer Lane<br>Stamford, Conn., 06904   |
| 19. *Elmco Corporation<br>P.O. Box 300<br>Salt Lake City, Utah 84110                                       | 20. E.I. duPont DeNemours & Co., Inc.<br>1007 Market St.,<br>Wilmington, Del. 19898                                 |
| 21. Eldib Engineering & Research Inc.<br>170 Blanchard St.,<br>Newark, N.J. 07105                          | 22. Elgin Softner, Inc.<br>440 So. McLean Blvd.<br>Elgin, Illinois 60120  |
| 23. FMC Corp., Link-Belt<br>Prudential Plaza, Dept.69-PCD<br>Chicago, Ill. 60601                           | 24. Fuller Co.<br>124 Bridge St.,<br>Catasaqua, Pa. 18032   |

- |   |   |
|---|---|
| 25. General Filter Co.<br>Arrasmith Trail<br>P.O. Box 350<br>Ames, Iowa 50010                             | 26. Glenfield & Kennedy, Inc.<br>P.O. Box 191<br>King of Prussia, Pa. 19406                             |
| 27. Hays Process<br>Box 768<br>Waco, Texas 76703  | 28. Hills-McCanna Co.<br>400 Maple Ave<br>Carpentersville, Ill. 60110                                   |
| 29. Kisco Boiler & Engineering Co.<br>P.O. Box 328<br>St. Louis, Mo. 63116                                | 30. Koch Engineering Co., Inc.<br>Pollution Control Div.,<br>342 Madison Ave.,<br>New York, N. Y. 10017 |
| 31. Komline-Sanderson Engr Corp<br>Peapack, N. J. 07977   | 32. *Lakeside Engineering Corp<br>222 W. Adams St.,<br>Chicago, Ill. 60606                              |
| 33. Litton Systems, Inc., Applied<br>Sciences Div.,<br>2003 E. Hennepin Ave.<br>Minneapolis, Minn., 55413 | 34. +Lyco Systems, Inc.<br>P.O. Box 569<br>Williamsport, Pa. 17701                                      |
| 35. +Mack Vault Company<br>P.O. Box 335<br>Valley City, Ohio 44280  | 36. +Marolf Hygienic Equipment, Inc.<br>7337 Sylvania Ave.<br>Toledo, Ohio 43623                        |
| 37. National Tank Co., Div of<br>Combustion Engineering, Inc.<br>P.O. Box 1710<br>Tulsa, Okla. 74101      | 38. Neptune Micro Flocc, Inc.<br>P.O. Box 612<br>Corvallis, Ore. 97330                                  |
| 39. Pacific Flush Tank Co.<br>4241 Ravenswood Ave.<br>Chicago, Ill. 60613                                 | 40. +Pall Corporation<br>30 Seaclyff Ave.<br>Glen Cove, L.I. New York 11542                             |
| 41. Pickands, Mather & Co., Preenco Div.<br>2000 Union Commerce Bldg.<br>Cleveland, Ohio 44115            | 42. Piqua Machine & Mfg., Co.<br>420 E. Third St.,<br>Piqua, Ohio 45356                                 |
| 43. +Pollution Control Inc.<br>Suite 21<br>Lunken Airport Administration Bldg.<br>Cincinnati, Ohio 45226  | 44. Resources Control, Inc.<br>Frontage Rd<br>West Haven, Conn. 06516                                   |
| 45. Rex Chainbelt, Inc.<br>P.O. Box 2022<br>Milwaukee, Wis. 53201   | 47. +Smith & Loveless, Div. of<br>Union Tank Car Co.<br>96th and Old S. Hwy.<br>Lenexa, Kans. 66215     |
| 46. *Schmieg Div<br>Sydney Hydordynamics Inc.<br>1305 Brook Rd.<br>Richmond Va. 23212                     | 48. Surburbia Systems, Inc.,<br>Box 6217<br>Leawood, Kansas 66206                                       |

- |   |  |
|---|--|
| 49. Tailor & Co., Inc.<br>2403 State St.,<br>Bettendorf, Iowa 52722               | 50. Texas Engineering Corp<br>P.O. Box 13161<br>Houston, Tex. 77019                                      |
| 51. Vulcan Laboratories, Inc.<br>408 Auburn Ave.<br>Pontiac, Michigan 48058       | 52. Walker Process Equip. Inc.<br>Div of Chicago Bridge & Tran. Co.<br>Box 266<br>Aurora, Illinois 60507 |
| 53. Waste Water Treatment Corp.<br>415 Lexington Ave.<br>New York, New York 10017 | 54. +Water Pollution Control Corp.<br>P.O. Box 744<br>Milwaukee, Wisconsin 53201                         |
| 55. Welles Products Corp<br>1600 N. 2nd St.,<br>Roscoe, Ill. 61073                | 56. Western Water Equipment Co.<br>925 Tanklage Rd.<br>San Carlos, Calif. 94070                          |
| 57. Yeomans Brothers Co.<br>1999 N. Ruby St.,<br>Melrose Park, Ill. 60160         | 58. Zurn Industries Inc., (Pollution<br>Control Group)<br>1801 Pittsburgh Ave.<br>Erie, Pa. 16512        |

+ National Sanitation Foundation

\* Answered WLDC "Product Questionnaire"

REFERENCES

1. Goodman, Brian L., "Package Plants - Past, Present and Future," Civil Engineering, American Society of Civil Engineers, February 1969.
2. Goodman, Brian L., Package Plant Criteria Development Part I: Extended Aeration, Federal Water Pollution Control Administration Demonstration Grant, Project WPD-74, National Sanitation Foundation, Ann Arbor, Michigan, September 1966.
3. Dempster, Andrew T., Certificate of Performance for an Extended Aeration Package Sewage Treatment Plant, National Sanitation Foundation, Ann Arbor, Michigan, 1 November 1967.
4. Baker, Ralph H. Jr., "Package Aeration Plants In Florida," Journal of the Sanitary Engineering Division, Proceedings of the American Society of Civil Engineers, Vol. 88, No. SA6, November 1962, pp 15-95.
5. Berk, William L., Theory, Operation and Cost of the Oxidation Ditch Process, Lakeside Engineering Corporation, Chicago, Illinois.
6. Dempster, Andrew T., Package Sewage Treatment Plant Criteria Development Part II: Contact Stabilization, Federal Water Pollution Control Administration Demonstration Grant, Project WPD-74, National Sanitation Foundation, Ann Arbor, Michigan, June 1968.
7. E.A. Aerotor Plant, Lakeside Engineering Corporation, Chicago, Illinois.
8. Joost, Robert H., Systemation in Using the Rotating Biological Surface (RBS) Waste Treatment Process, Paper presented at The 24th Annual Purdue Industrial Waste Conference, Purdue University, Lafayette, Indiana, 6-8 May 1969.

UNCLASSIFIED  
Security Classification

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author)		2a. REPORT SECURITY CLASSIFICATION	
Air Force Weapons Laboratory (WLDC) Kirtland Air Force Base, New Mexico 87117		UNCLASSIFIED	
		2b. GROUP	
3. REPORT TITLE			
SUMMARY OF COMMERCIAL WASTE WATER TREATMENT PLANTS			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)			
1 January 1969-15 August 1969			
5. AUTHOR(S) (First name, middle initial, last name)			
James A. Mahoney			
6. REPORT DATE		7a. TOTAL NO. OF PAGES	7b. NO. OF REFS
September 1969		66	8
8a. CONTRACT OR GRANT NO.		9a. ORIGINATOR'S REPORT NUMBER(S)	
b. PROJECT NO.		AFWL-TR-69-121	
c. Subtask No. 3.1.001		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.			
10. DISTRIBUTION STATEMENT This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of AFWL (WLDC), Kirtland AFB, NM, 87117. Distribution is limited because of the technology discussed in the report.			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY	
		AFWL (WLDC) Kirtland AFB, NM 87117	
13. ABSTRACT			
(DISTRIBUTION LIMITATION STATEMENT NO. 2) The purpose of the report is to catalog and review capabilities of commercially available packaged waste water treatment plants for possible Air Force application in limited war and fixed base installations. Definitions of the various methods of treatment are included. Simple curves are furnished for a quick estimate of costs, power requirements, erection time, shipping volume and weight in relation to flow capacity. Included are tables which relate the performances of a number of plants tested by the National Sanitation Foundation, by the manufacturer, and by the Florida State Board of Health. A list of firms which manufacture packaged waste water treatment plants is included in an appendix.			

DD FORM 1473

UNCLASSIFIED  
Security Classification



14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Extended aeration Contact stabilization Oxidation ditch Waste water treatment Environics						